




Keurig K40 Spring Replacement

This guide will help you replace the spring that allows the lid to open and close.

Written By: Michelle Sanchez

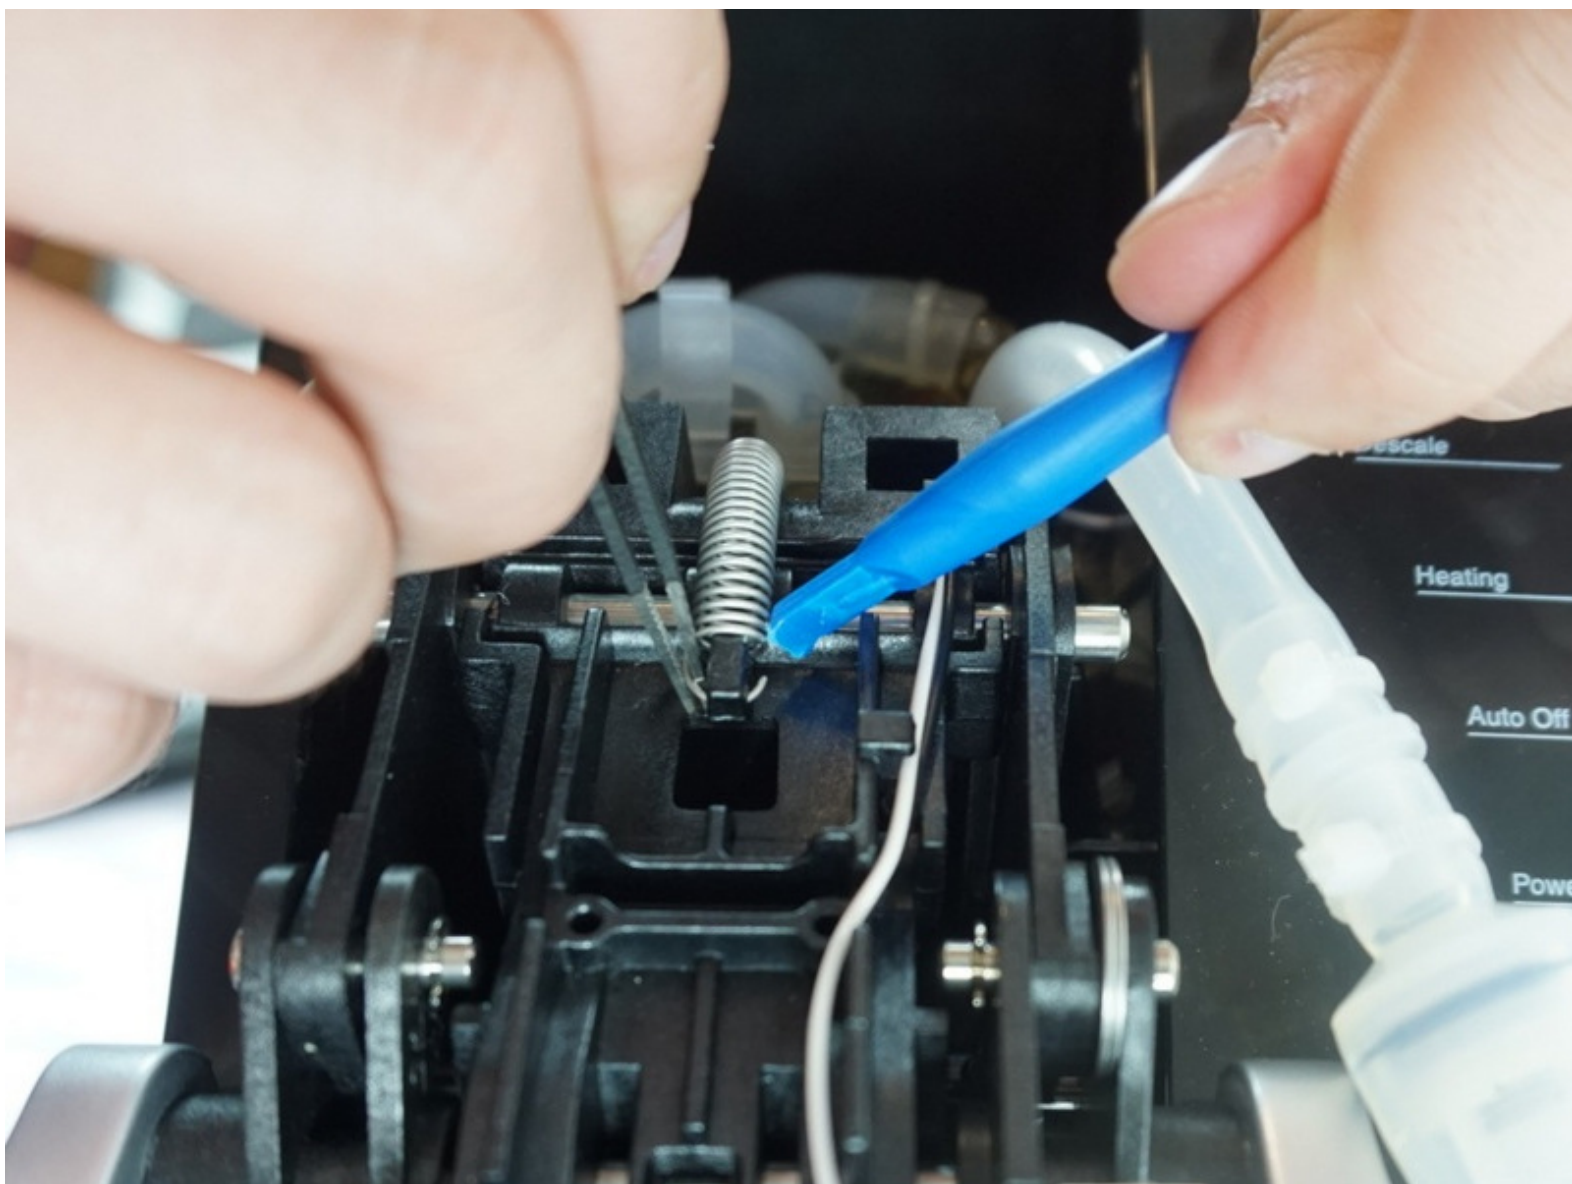

INTRODUCTION

To get to the spring the K-cup assembly housing, the lid, and the water pump will need to be removed.



TOOLS:

- [Tweezers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Phillips #2 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Spring




- Using a Phillips #2 screwdriver unscrew two 2mm screws.
- Once the screws are out, lift up and squeeze the k-cup assembly housing to take it out.

Step 2




- Use the handle to open the lid then squeeze and move the lid around to take it off.

Step 3

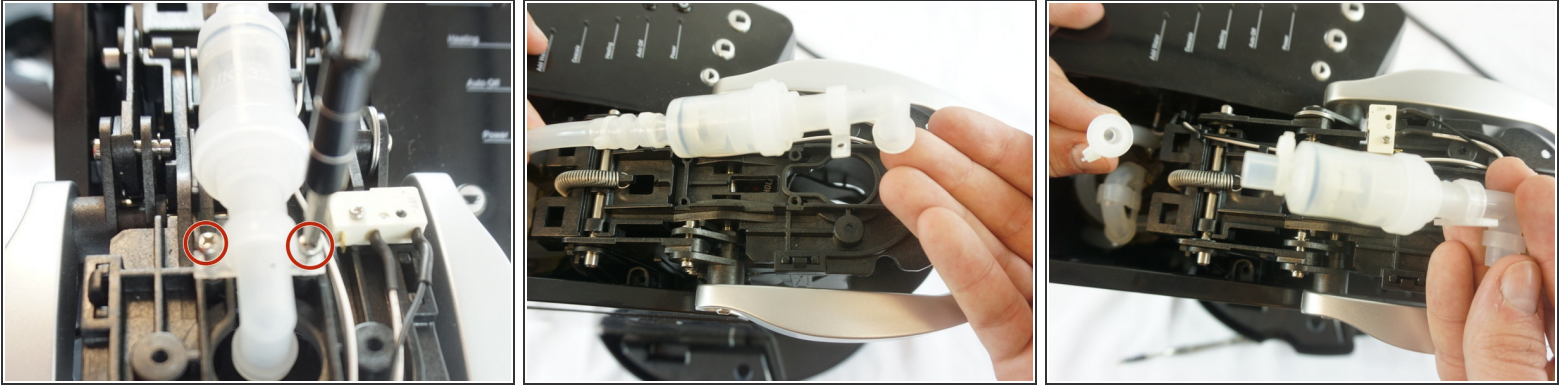

- Using the Phillips #0 screwdriver unscrew two 2mm screws on the water pump.
- Once unscrewed lift the water pump up and pull and twist it off.

Step 4

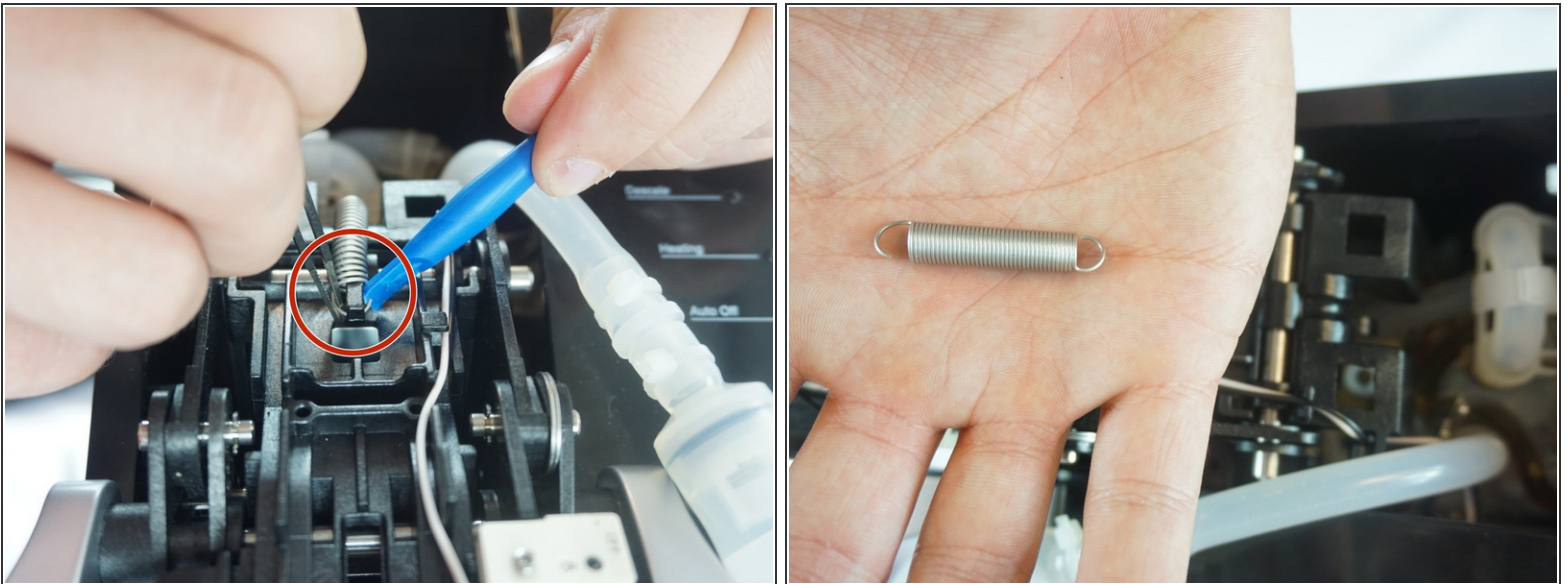

- Using the tweezer and the plastic opening tool grab the front of the spring to take it off.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-12 01:54:05 AM.